


## Z801/...

Schnellkupplung, mit freiem Durchgang  
Rapid coupling, open flow  
Coupleur rapide, à passage ouvert

Mat.: 2.0401

Z8021/...  
Z81/...  
Z83/...  
Z830/...  
Z831/...  
Z90/...

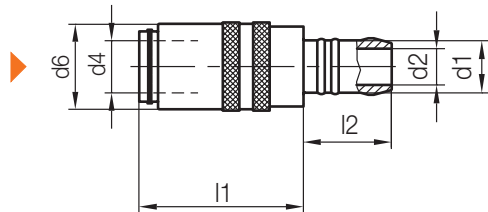

Z85/...  
Z850/...  
Z851/...  
Z852/...  
Z8525/...  
Z853/...  
Z854/...



| Medium             | max. C° |
|--------------------|---------|
| Luft /air/air      | 200     |
| Öl /oil /huile     | 200     |
| Wasser /water /eau | 150     |



Schlauchgrenzwerte können abweichen!  
Hose limits can differ!  
Les valeurs limites des tuyaux peuvent différer!


| p [bar] | l2   | l1   | d6 | d4 | d2  | d1 | Nr. / No. |
|---------|------|------|----|----|-----|----|-----------|
| 25      | 13,5 | 21,5 | 10 | 5  | 3,5 | 5  | Z801/ 5   |
|         | 22   | 31   | 17 | 9  | 6   | 9  | 9         |
|         | 25   | 37   | 22 | 13 | 9   | 13 | 13        |
|         | 32   | 58   | 31 | 19 | 13  | 19 | 19        |

## Z801/...x45

Schnellkupplung, mit freiem Durchgang, 45° abgewinkelt  
Rapid coupling, open flow, 45° angled  
Coupleur rapide, à passage ouvert, coudé à 45°

Mat.: 2.0401

Z8021/...  
Z81/...  
Z83/...  
Z830/...  
Z831/...  
Z90/...

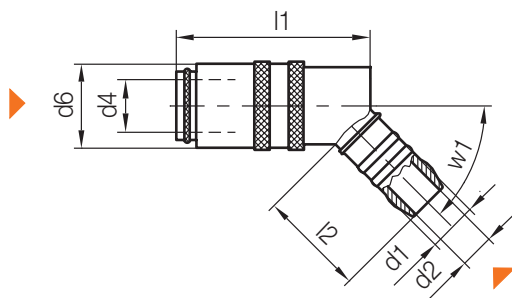

Z85/...  
Z850/...  
Z851/...  
Z852/...  
Z8525/...  
Z853/...  
Z854/...



| Medium             | max. C° |
|--------------------|---------|
| Luft /air/air      | 200     |
| Öl /oil /huile     | 200     |
| Wasser /water /eau | 150     |



Schlauchgrenzwerte können abweichen!  
Hose limits can differ!  
Les valeurs limites des tuyaux peuvent différer!


| p [bar] | l2   | l1   | d6 | d4 | d2  | d1 | w1  | Nr. / No.  |
|---------|------|------|----|----|-----|----|-----|------------|
| 25      | 13,5 | 29,6 | 10 | 5  | 3,5 | 5  | 45° | Z801/ 5x45 |
|         | 28   | 41,1 | 17 | 9  | 6   | 9  |     | 9          |
|         |      | 51,1 | 22 | 13 | 9   | 13 |     | 13         |
|         | 38   | 78   | 31 | 19 | 13  | 19 |     | 19         |

Z801/...x90

Schnellkupplung, mit freiem Durchgang, 90° abgewinkelt  
Rapid coupling, open flow, 90° angled  
Coupleur rapide, à passage ouvert, coudé à 90°

Mat.: 2.0401

Z8021/...  
Z81/...  
Z83/...  
Z830/...  
Z831/...  
Z90/...

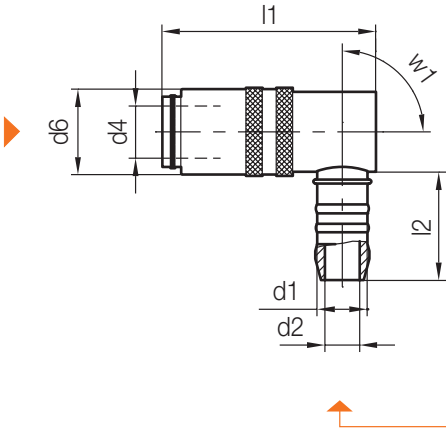

Z85/...  
Z850/...  
Z851/...  
Z852/...  
Z8525/...  
Z853/...  
Z854/...



| Medium           | max. C° |
|------------------|---------|
| Luft/air/air     | 200     |
| Öl/oil/huile     | 200     |
| Wasser/water/eau | 150     |

⚠  
Schlauchgrenzwerte können abweichen!  
Hose limits can differ!  
Les valeurs limites des tuyaux peuvent différer!

| p [bar] | l2   | l1   | d6 | d4 | d2  | d1 | w1  | Nr. / No.  |
|---------|------|------|----|----|-----|----|-----|------------|
| 25      | 13,5 | 29,5 | 10 | 5  | 3,5 | 5  | 90° | Z801/ 5x90 |
|         | 24   | 41   | 17 | 9  | 6   | 9  |     | 9          |
|         | 28   | 51   | 22 | 13 | 9   | 13 |     | 13         |
|         | 34   | 78   | 31 | 19 | 13  | 19 |     | 19         |